
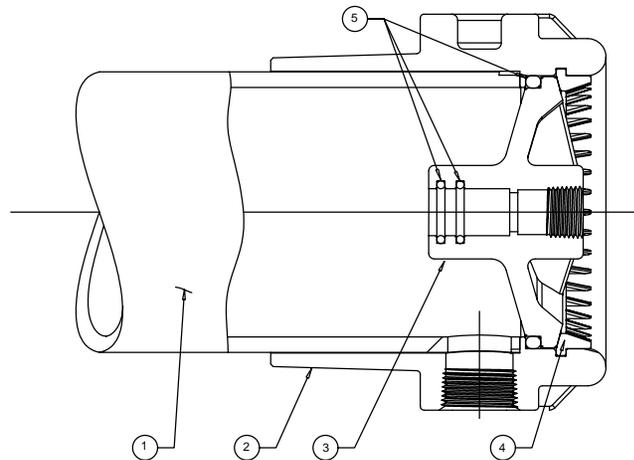


4

3

2

1

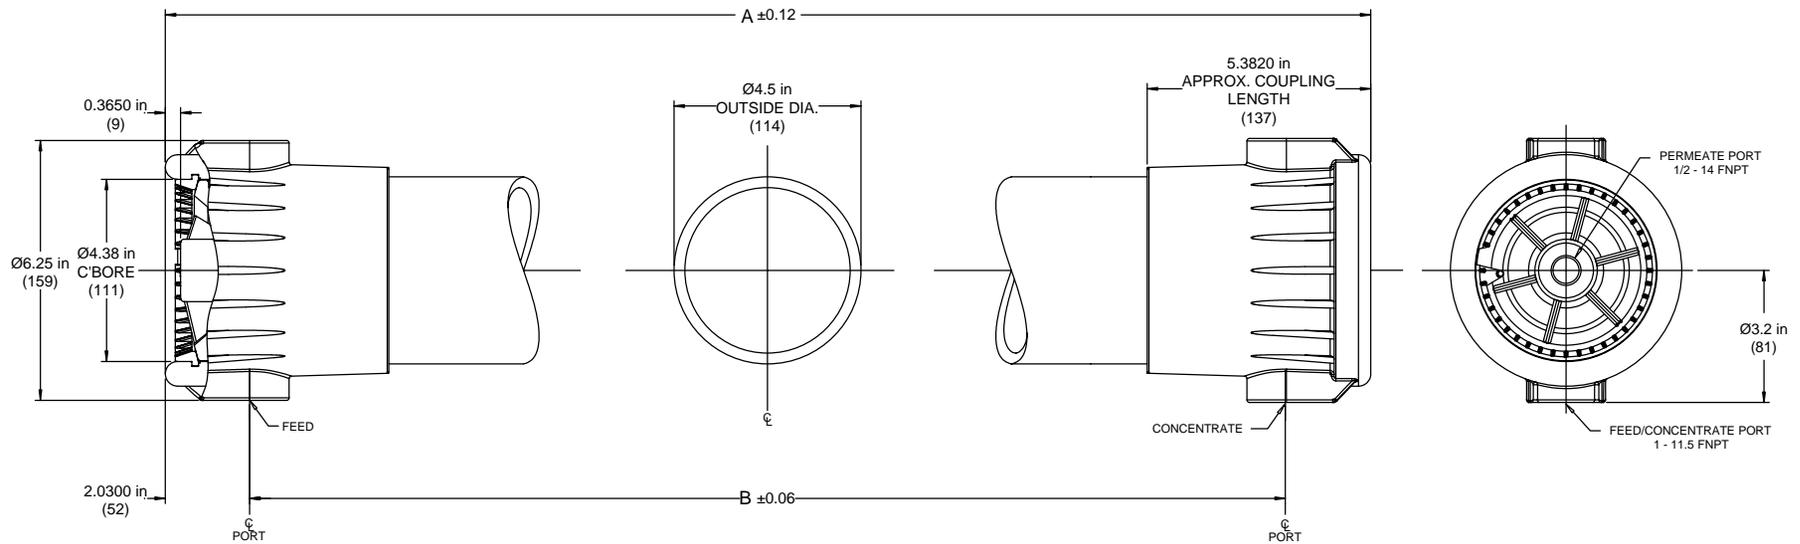

\* DIMENSIONS IN INCHES (MM APPROX.)  
\* NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED

SECTION THROUGH END CAP  
(BOTH ENDS ARE IDENTICAL)

RATING:  
MAX. OPERATING PRESSURE 225 PSI  
MAX. OPERATING TEMP. 110 F  
MIN. OPERATING TEMP. 35 F  
BURST PRESSURE 500 PSI

PARTS LIST					STYLE MODEL NUMBER	A O.A.L IN	B PORT TO PORT IN	APPROX. WEIGHT ASSEMBLED LB (KG)
REF. NUMBER	QTY	PART NUMBER	PART NAME	MATERIAL				
<b>HOUSING</b>					4" x 14" EHP40NG-1400-2S0	18.50"	14.12"	7 (3.2)
①	1	N/A	HOUSING BODY	PVC	4" x 28/32" EHP40NG-3163-2S0	36.01"	31.63"	9 (4.1)
②	2	N/A	END COUPLING	GTX	<b>INTERNAL PARTS</b>			
③	1	EH-40BC-PET	END CAP (PLUGED)	GTX	4" x 33" EHP40NG-3700-2S0	41.38" 1.051mm	37.00" 940mm	11 (5.0)
④	1	EH-40TC-PET	END CAP (PORTED)	GTX	4" x 40" EHP40NG-4263-2S0	47.01"	42.63"	12 (5.4)
④	2	EH-40SR-D	SNAP RING	DELTRIN	4" x 40" EHP40NG-4300-2S0	47.38"	43.00"	12 (5.4)
⑤	2	EH-40SK-B	O-RING KIT	BUNA-N	4" x 40" EHP40NG-4963-2S0	54.01" 1.372mm	49.63" 1.260mm	13 (5.9)
<b>REVISIONS</b>					 4115 AVENIDA DE LA PLATA OCEANSIDE CA 92056 USA 1-877-737-7676			
REV	DESCRIPTION	DATE	APPROVED					
N/C	PRODUCTION RELEASE	12/01/03	MKM					
A	Change part numbers	8/19/05	MKM					
<b>4" ELEMENTHOUSING</b>					UNITS in DWG NO. EHP40NG-XXXX-2S2			
TOLERANCE +/- 0.03					DRAWN BY MKM SHEET 1 OF 1			

#### CONFIDENTIALITY NOTE

This information is intended for the use of the individual or entity to which it is addressed and may contain information that is privileged, confidential and exempt from disclosure under applicable law. You are hereby notified that any dissemination, distribution or copying of this communication is strictly prohibited.

4

3

2

1