

## Depth filtration cartridges

# WOUND POLYPROPYLENE CARTRIDGE

## FA

[Link to product's PDF drawing](#) 

### TECHNICAL FEATURES:

Type	FA
Type	Wound PP
Height	40"
Micron	1
Efficiency	80%
Hot sanitizing	No

### APPLICATIONS

Water
Sea water

### OTHER APPLICATIONS ONLY AFTER WRITTEN APPROVAL OF MANUFACTURER

Electronic/Nuclear
Biotechnology/Fine chemicals
Food/Beverage
Coatings/Resins
General Industrial
Bulk Chemicals/Petrochemicals
Galvanic
Drinking Water

### MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

### PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

### TEMPERATURE

Max working temperature	80°C
-------------------------	------



Code	Description	Height	Micron	Flow l/h	Filtering surface	Quantity box	€/each
FA4001ST	FA 40-01	40"	1	1.200	0,20 m <sup>2</sup>	15	-

## Depth filtration cartridges

# WOUND POLYPROPYLENE CARTRIDGE

## FA

### END CAPS LIST

End Caps	DOE (Standard)
CODE	ST



### TABELLA CODICI CARTUCCE

Model	Height		Micron		Connection		Seals	
FA	40"	40	1 µm	01	DOE (Standard)	ST		


# Depth filtration cartridges

## WOUND POLYPROPYLENE CARTRIDGE

### FA

#### FLOW RATE VS PRESSURE DIFFERENTIAL

##### Pressure differential

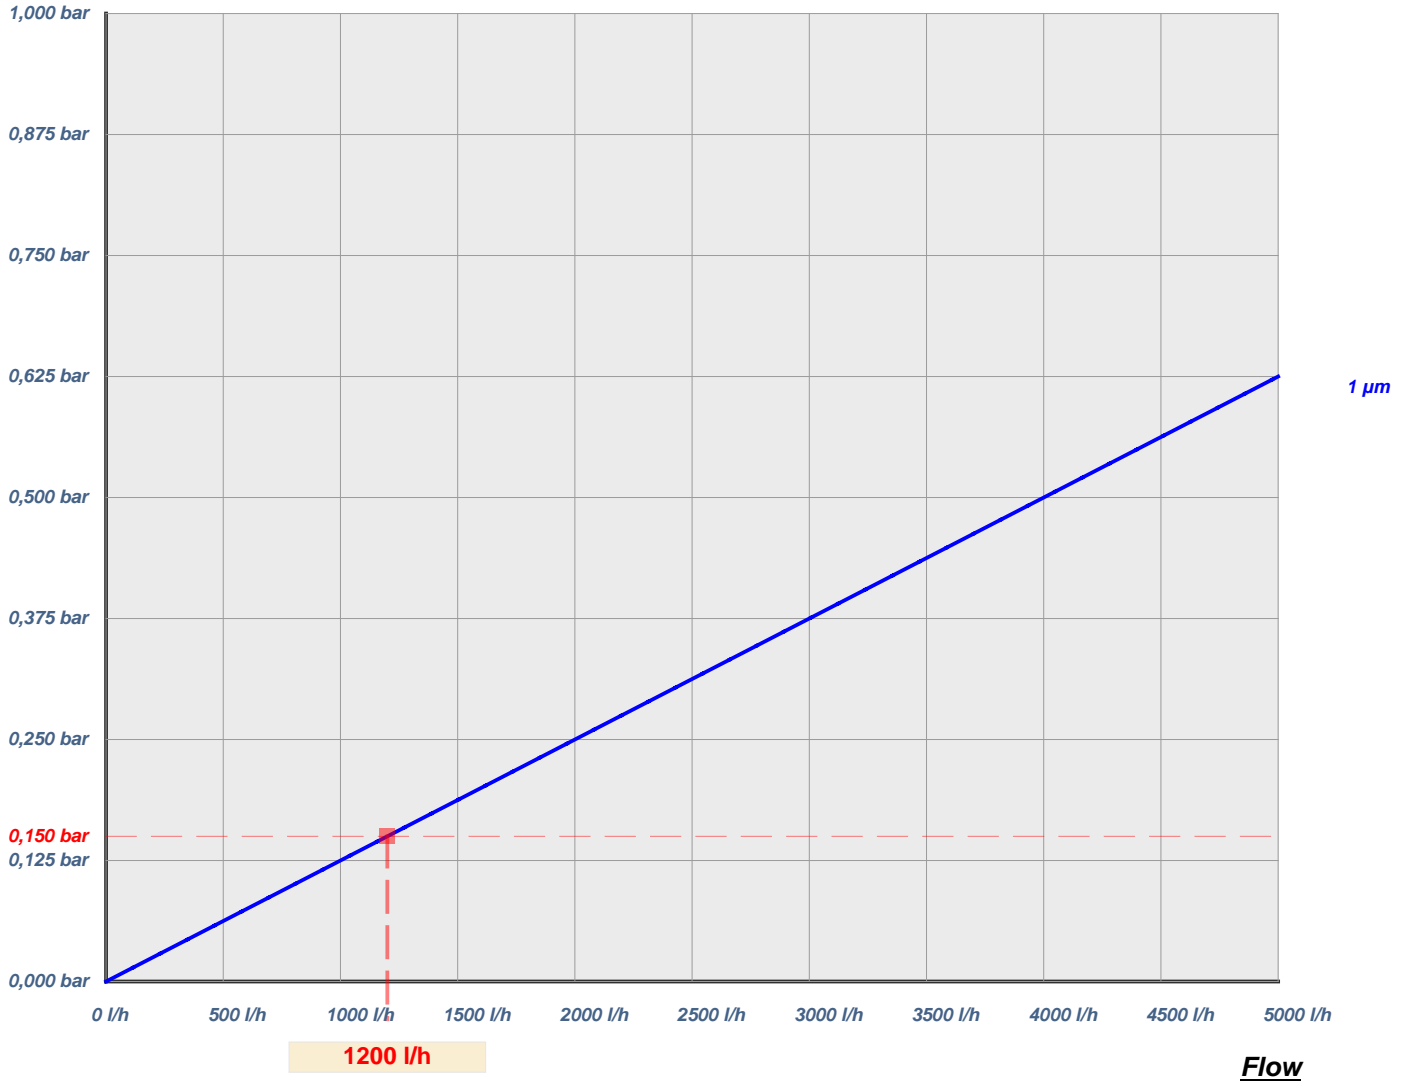

Graphic refers to 40" height cartridges. Make the correct proportion to obtain flow for taller cartridges.