

Depth filtration cartridges

WOUND POLYPROPYLENE CARTRIDGE

FA

[Link to product's PDF drawing](#) 

TECHNICAL FEATURES:

Type	FA
Type	Wound PP
Height	40"
Micron	20
Efficiency	80%
Hot sanitizing	No

APPLICATIONS

Water
Sea water

OTHER APPLICATIONS ONLY AFTER WRITTEN APPROVAL OF MANUFACTURER

Electronic/Nuclear
Biotechnology/Fine chemicals
Food/Beverage
Coatings/Resins
General Industrial
Bulk Chemicals/Petrolchemicals
Galvanic
Drinking Water

MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	80°C
-------------------------	------



Code	Description	Height	Micron	Flow l/h	Filtering surface	Quantity box	€/each
FA4020ST	FA 40-20	40"	20	4.000	0,20 m ²	15	-

Depth filtration cartridges

WOUND POLYPROPYLENE CARTRIDGE

FA

END CAPS LIST

End Caps	DOE (Standard)
CODE	ST



TABELLA CODICI CARTUCCE

Model	Height		Micron		Connection		Seals	
FA	40 "	40	20 µm	20	DOE (Standard)	ST		


Depth filtration cartridges

WOUND POLYPROPYLENE CARTRIDGE

FA

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

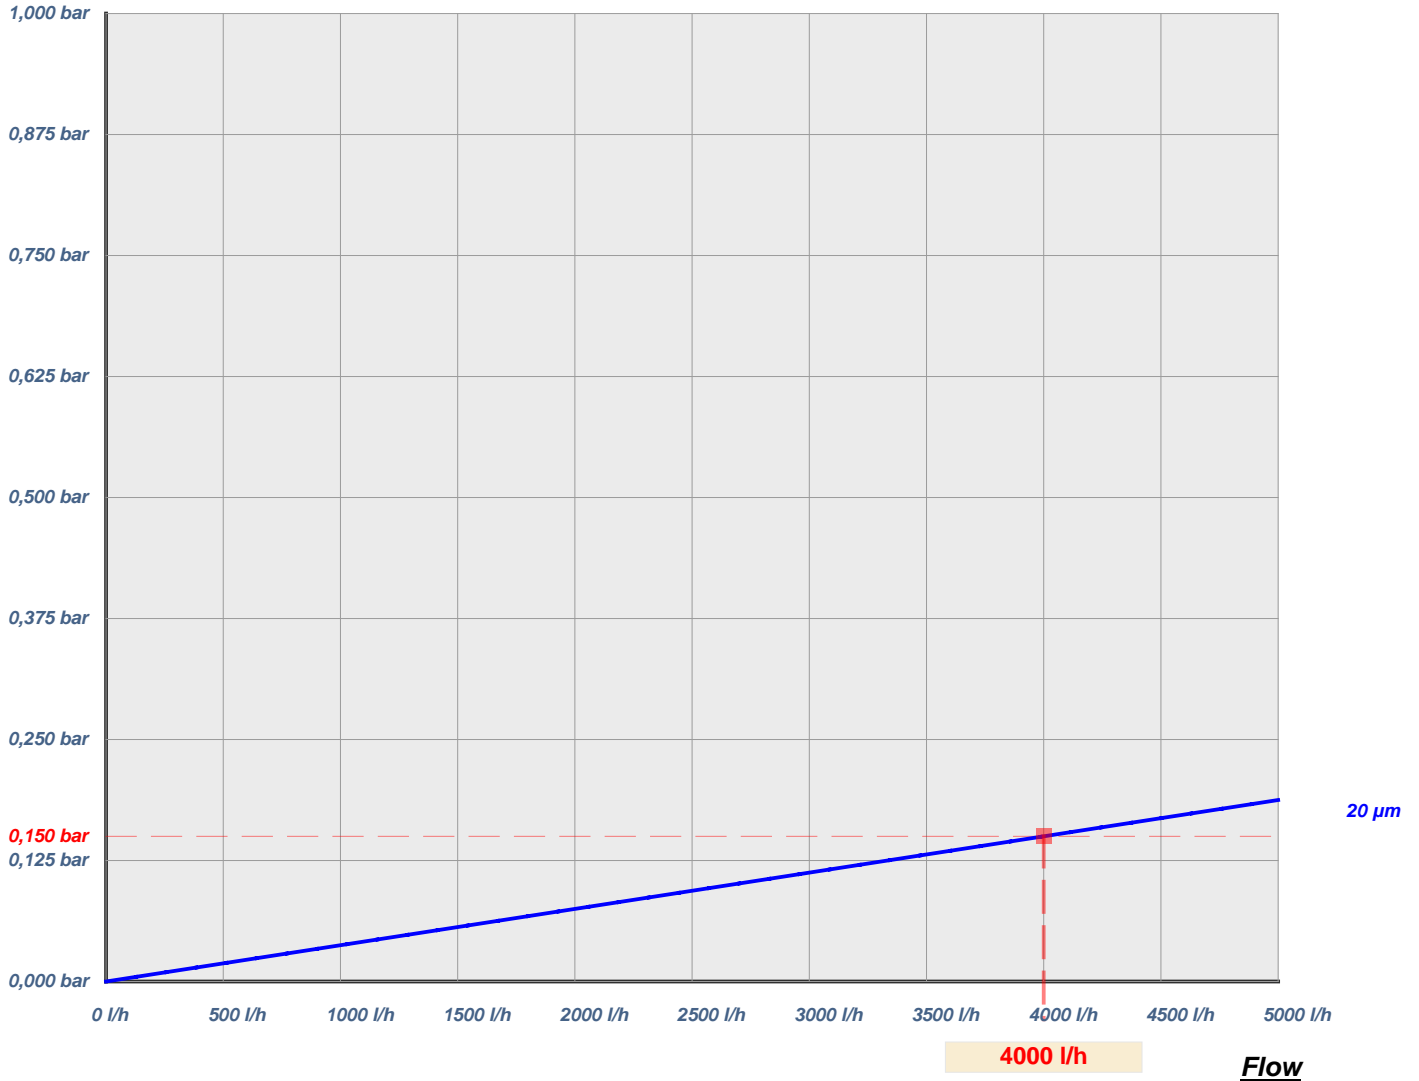

Graphic refers to 40" height cartridges. Make the correct proportion to obtain flow for taller cartridges.